


1.4 Rear Apron Features

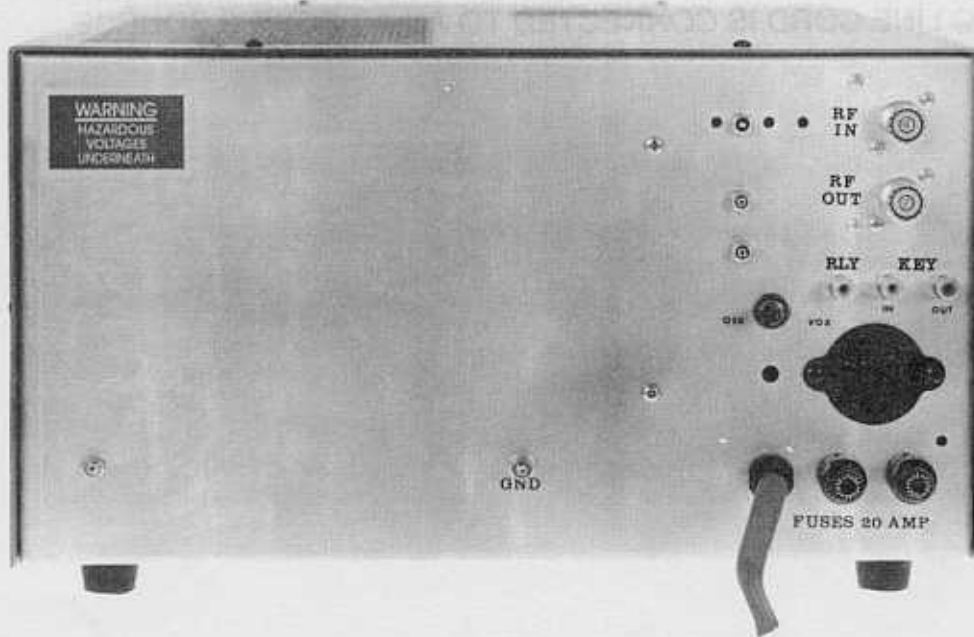

RF-IN - For connecting to exciter RF output to the amplifier.

RF-OUT - For connecting the LK400/500 series linear amplifier to an antenna.

RLY - For connecting to exciter auxiliary jack to activate T/R Relay in the LK400/500 series amplifiers.

KEY IN - QSK ONLY - station key, must be a bug, hand key or a keyer

KEY OUT - QSK ONLY - hooks to the KEY-IN jack on a QSK transceiver.

QSK VOX SWITCH - place in the QSK position when operating QSK CW.

GROUND LUG - Attach to a good earth ground.

FUSES - 2 holders provided to protect each leg of the AC line.

SERIAL NUMBER - Located on the model type identification sticker.

AC LINE CORD - Connect to proper power requirements only.

PAC-5 PLUG - LK550/LK500 w/optional PAC-5 only. Connects the PAC-5 power transformer to LK550/LK500.